

1: GLAZING MATERIAL

	INNER	OUTER
POLYCARBONATE DOME	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

2: GLAZING COLOR

CLEAR	<input checked="" type="checkbox"/>	<input type="checkbox"/>
BRONZE	N/A	<input type="checkbox"/>
WHITE	<input type="checkbox"/>	<input checked="" type="checkbox"/>
OTHER _____		


3: FRAME FINISH

MILL	<input checked="" type="checkbox"/>
BRONZE ANODIZED	<input type="checkbox"/>
CLEAR ANODIZED	<input type="checkbox"/>
CUSTOM COLOR _____	

FOR CURB MOUNT SKYLIGHTS PROVIDE  
OUTSIDE DIMENSION OF FINISHED CURB

QTY: 3    OD CURB = 96 X 96

OSHA (Standards—29 CFR)—1910.23(e)(8)  
1200lb Impact Load

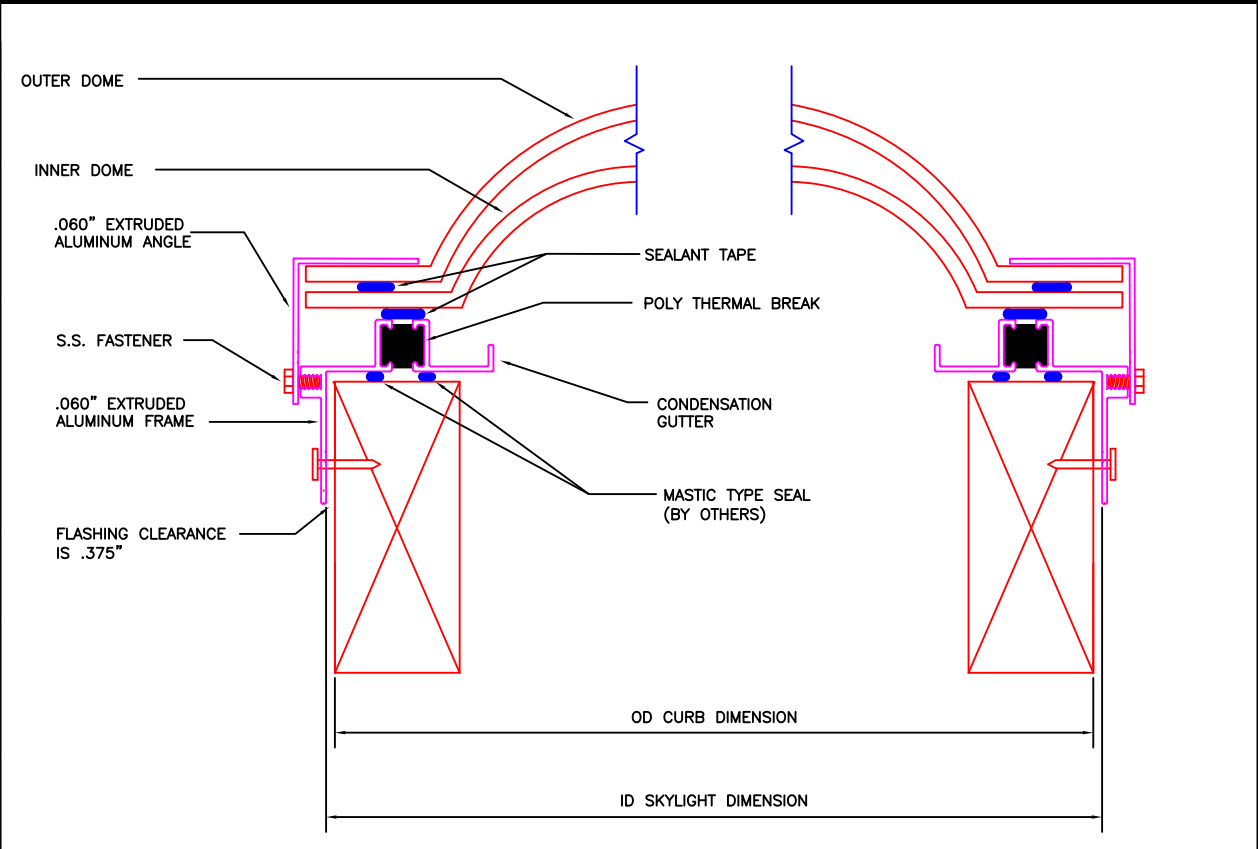

FALL PROTECTION THERMALLY BROKEN CURB MOUNT  
(MODEL TCM-FG)



**AMERICAN SKYLIGHTS**  
Phone: 855.772.7401    Fax: 855.445.7282