

1: GLAZING MATERIAL

	INNER	OUTER
POLYCARBONATE DOME	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

2: GLAZING COLOR

CLEAR	<input type="checkbox"/>	<input type="checkbox"/>
BRONZE	<input type="checkbox"/>	<input type="checkbox"/>
WHITE	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
OTHER _____	<input type="checkbox"/>	<input type="checkbox"/>


3: FRAME FINISH

MILL	<input type="checkbox"/>
BRONZE ANODIZED	<input type="checkbox"/>
CLEAR ANODIZED	<input checked="" type="checkbox"/>
CUSTOM COLOR _____	<input type="checkbox"/>

OSHA (Standards-29 CFR)-1910.23(e)(8)

FOR SELF FLASHING SKYLIGHTS PROVIDE
ROUGH OPENING OR ID OF SKYLIGHT DIMENSION

QTY: 38 R.O. = VERIFY

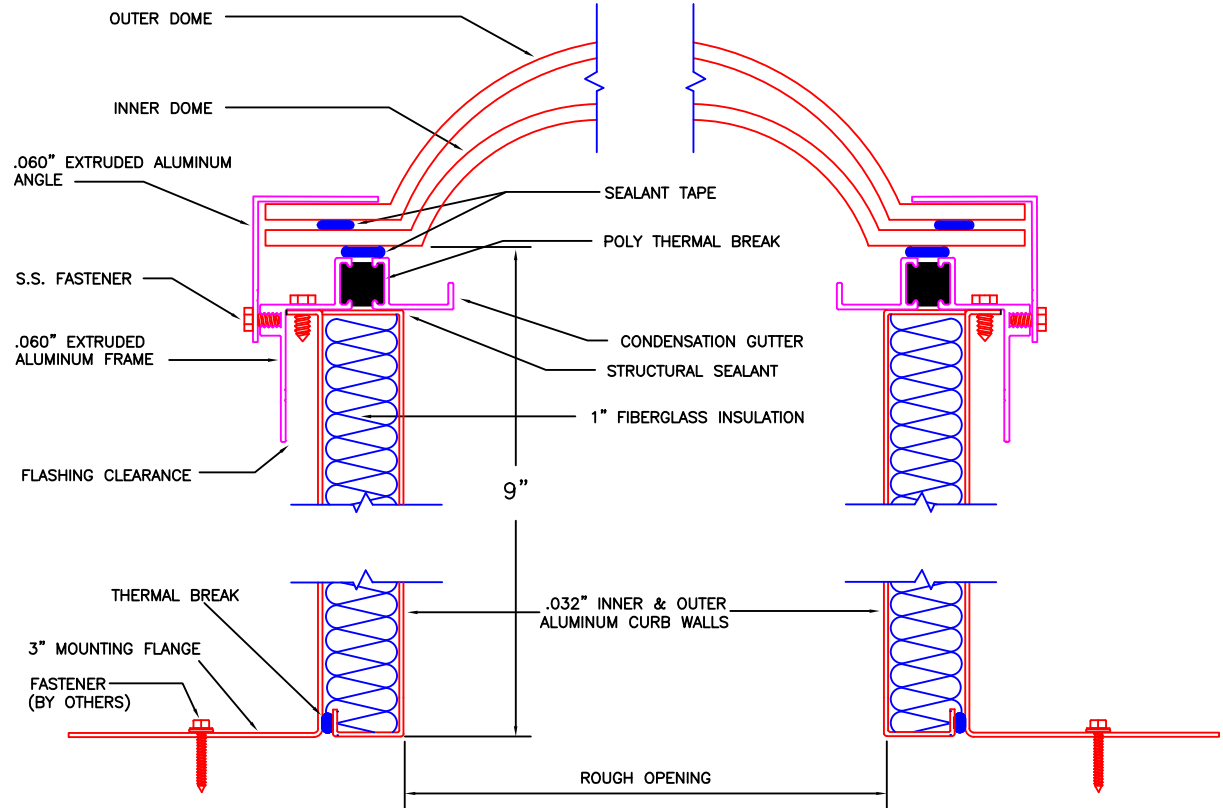

9" THERMALLY BROKEN & INSULATED SELF FLASHING
FALL PROTECTION RATED UNIT
(MODEL TSF-9-FG)



AMERICAN SKYLIGHTS
Phone: 855.772.7401 Fax: 855.445.7282